

Mod. WE - AS


The Mod. **WE** and **AS** Anchors are addressed to the companies that work in the Fish Farming sector in the sea and need to fasten to the seabed the net cages in the environments intended for their Breeding Farms.

Mod. WE

The Mod. **WE** Anchors are supplied in one piece wholly welded in the versions of 500, 800 and 1000 (nominal) Kg. On each anchor there are two holes for the application of eyebolts, which are necessary both for the installation and for fixing the ropes that fasten the nets, and a hole for the insertion of the anti-tipping bar which is supplied disassembled from the anchor. The lower blade has on the V-shaped front part a bevel that facilitates the penetration of the blade itself into the seabed, thus adding the anchor function to the ballast function. The anchors are supplied with standard protective treatment consisting of opaque base Ral. 9005 and 40 µm (min.) thickness.

Mod. AS


The Mod. **AS** Anchors are supplied in assembly kits that can be assembled using bolts in the types of 500, 800 and 1000 (nominal) Kg. The characteristics of this anchor model, after assembly, correspond in all respects to those of the Mod. **WE**, but they allow to drastically reduce the overall dimensions optimizing the transport and storage phases.

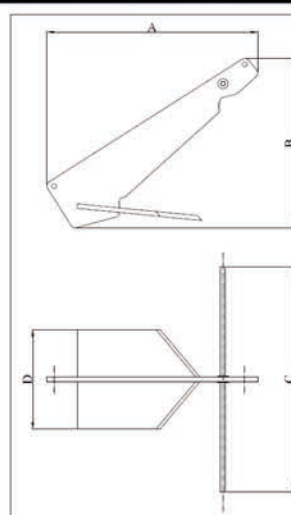

Mod. WE

MODELLI/ MODELS	MISURE D'INGOMBRO (mm)/ OVERALL DIMENSIONS (mm)			
	A	B	C	D
WE 500	1875 ca.	1505 ca.	2000 ca.	885 ca.
WE 800	2180 ca.	1825 ca.	2750 ca.	1057 ca.
WE 1000	2610 ca.	2095 ca.	2850 ca.	1230 ca.

FGMTech

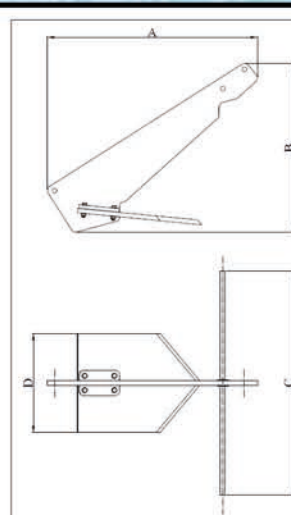

Mod. AS

MODELLI/ MODELS	MISURE D'INGOMBRO (mm)/ OVERALL DIMENSIONS (mm)			
	A	B	C	D
AS 500	1875 ca.	1505 ca.	2000 ca.	885 ca.
AS 800	2180 ca.	1825 ca.	2750 ca.	1057 ca.
AS 1000	2610 ca.	2095 ca.	2850 ca.	1230 ca.

FGMTech



Customized anchor models can be produced according to the customer's specific request.

On all the anchor models it is possible to carry out the hot galvanizing treatment as an alternative to the standard one.